



DOWEX™ MONOSPHERE™ MR-3 UPW

A Separable Uniform Particle Size Mixed Bed Ion Exchange Resin for Ultrapure Water Production

Product	Resin ratio	Matrix	Functional group
DOWEX™ MONOSPHERE™ MR-3 UPW	Note*	Styrene-DVB, gel	Sulfonic acid and quaternary ammonium

Guaranteed Sales Specifications		H ⁺ form	OH form
Total exchange capacity, min.	eq/L kgr/ft ³ as CaCO ₃	1.9 41.5	1.0 21.9
Water content	%	46 - 51	55 - 65
Bead size distribution [†]			
Mean particle size	μm	650 ± 50	590 ± 50
Uniformity coefficient, max.		1.1	1.1
Whole uncracked beads, min.	%	95	95
Crush strength			
Average, min.	g/bead	500	350
> 200 g/bead, min.	%	95	95

Typical Physical and Chemical Properties		H ⁺ form	OH form
Particle density	g/mL	1.22	1.08
Shipping weight**	g/L lbs/ft ³		689 43

Recommended Operating Conditions

- Maximum operating temperature 60°C (140°F)
- Resin bed depth, min. 800 mm (2.6 ft)
- Flow rates:
 Service 10 - 60 m/h (4 - 24 gpm/ft²)
- Pressure drop see Figure 1

UPW Mixed Resin Specific Properties

- Cationic resin conversion to H 99.9% min.
- Anionic resin conversion to:
 - OH 95% min.
 - CO₃ 5% max.
 - Cl 0.1% max.
- Rinse characteristics:
 - UPW grade resins are rinsed with +17.5 Megaohm.cm water to meet stringent ionic and organic residuals
 - Ionic conductivity rinse down to 0.055 μS/cm (see Figure 2) 1 bed volume
 - TOC rinse down to 2 ppb (+) (see Figure 2) 50 bed volumes

Note* Resin ratio of anion to cation is volumetrically optimized to achieve maximum removal of boron and silica.

[†] For additional particle size information, please refer to Particle Size Distribution Cross Reference Chart (Form No. 177-01775).

(+) delta TOC ppb measured in/out

** As per the backwashed and settled density of the resin, determined by ASTM D-2187.

Typical Properties and Applications

DOWEX™ MONOSPHERE™ MR-3 UPW grade resin is recommended as a working or polishing mixed bed to complement two bed ion exchange or reverse osmosis systems. It can be used as a regenerable mixed bed since the color difference and particle size difference will allow a visually good separation to achieve optimal regeneration. Very low ionic load to a regenerable mixed bed can occasionally lead to clumping, especially when the mixed bed is operated to a boron or silica break. An improvement in the manufacturing process of DOWEX MONOSPHERE 550A UPW grade will eliminate cation/anion clumping under normal regeneration conditions.

The UPW grade is characterized by the high conversion to ionic sites (95.0% min.) and a volumetric ratio that allows a higher exchange of boron and silica. As shown in Figure 2, the excellent rinse characteristics also allow a very efficient on-line operation.

Figure 1. Pressure Drop Data


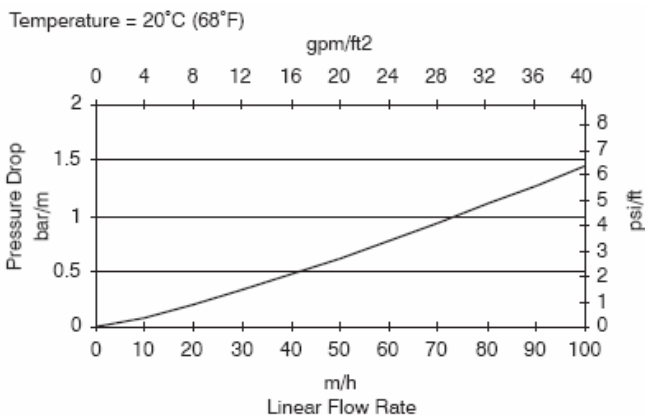


Figure 2. Conductivity and TOC Rinsedown Curves

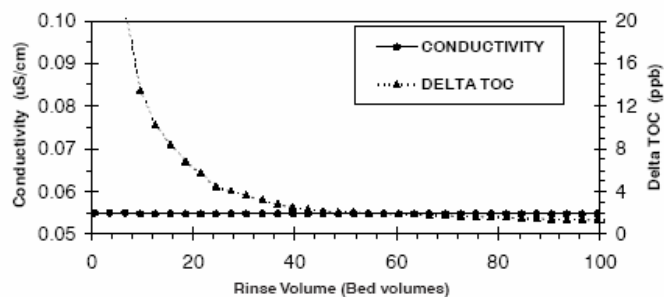

For other temperatures use:

$$P_T = P_{20^\circ\text{C}} / (0.026 T_{\text{°C}} + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{68^\circ\text{F}} / (0.014 T_{\text{°F}} + 0.05), \text{ where } P \equiv \text{psi/ft}$$

DOWEX™ Ion Exchange Resins

For more information about DOWEX resins, call the Dow Water Solutions business:

North America: 1-800-447-4369
 Latin America: (+55) 11-5188-9222
 Europe: (+32) 3-450-2240
 Pacific: +60 3 7958 3392
 Japan: +813 5460 2100
 China: +86 21 2301 9000

<http://www.dowwatersolutions.com>

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Dow assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

