

Membrane Element

PROC10

Performance:	Permeate Flow (nominal):	10, 500 gpd (39.7 m ³ /d)
	NaCl Rejection (minimum):	99.60 %
	NaCl Rejection (nominal):	99.75 %


Type	Configuration:	Spiral Wound
	Membrane Polymer:	Composite Polyamide
	Nominal Membrane Area:	400 ft ²
	Brine spacer	34 mil

Application Data	Maximum Applied Pressure:	600 psig (4.16 MPa)
	Maximum Chlorine Concentration:	< 0.1 PPM
	Maximum Operating Temperature:	113 °F (45 °C)
	Feedwater pH Range:	2.0 - 11.0
	Maximum Feedwater Turbidity:	1.0 NTU
	Maximum Feedwater SDI (15 mins):	5.0
	Maximum Feed Flow:	90 GPM (20.0 m ³ /h)
	Minimum Ratio of Concentrate to Permeate Flow for any Element:	5:1
	Maximum Pressure Drop for Each Element:	15 psi

*The limitations shows here are for general use. The values may be more conservative for specific projects to ensure the best performance and longest life of the membrane.

Test Conditions The stated performance is based on the following test conditions:

- 2, 000 ppm NaCl solution
- 225 psi (1.55 MPa) Applied Pressure
- 77 °F (25 °C) Operating Temperature
- 15% Permeate Recovery
- 6.5 – 7.0 Feed pH

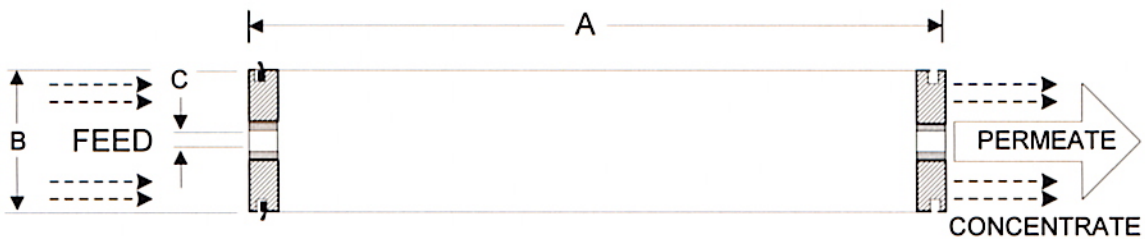

A, inches (mm)	B, inches (mm)	C, inches (mm)
40.0 (1016)	7.95 (201.9)	1.125 (28.6)

Notice: Permeate flow for individual elements may vary + or - 15 percent. All membrane elements are supplied with a brine seal, interconnector, and o-rings. All membrane elements are supplied with a brine seal, interconnector, and o-rings. Elements are vacuum sealed in a polyethylene bag containing less than 1.0% sodium bisulfite solution, and then packaged in a cardboard box.

Nitto Denko and Hydranautics believe the information and data contained herein to be accurate and useful. The information and data are offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. Nitto Denko and Hydranautics assume no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of and Hydranautics' products for the user's specific end uses.